UPPAbaby[°] MESA. Infant Car Seat and Base



Rear-facing Only 4-35 lbs

X TABLE OF CONTENTS

Read all instructions before use of the infant car seat. Keep instruction manual for future use. (Storage pocket located on underside of infant carrier.)

BEFORE YOU BEGIN 3 CERTIFICATION USE RECOMMENDATIONS REGISTRATION NOTICE OF EXPIRATION WARNINGS + GENERAL SAFETY INSTRUCTIONS 5 **INFANT SEAT FEATURES** 10 OVERVIEW OF BASE 10 12 OVERVIEW OF INFANT CARRIER VEHICLE COMPATIBILITY 14 CHOOSING A VEHICLE SEATING LOCATION 14 DETERMINING BEST INSTALLATION METHOD 15 BASE INSTALLATION 15 CARRIER INSTALLATION WITHOUT BASE 15 OVERVIEW OF LATCH 16 OVERVIEW OF VEHICLE SEAT BELT SYSTEMS 17 UNSAFE VEHICLE SEAT BELT SYSTEMS + SEATING 18

BASE INSTALLATION WITH LATCH	19
LEVELING BASE	19
BASE INSTALLATION WITH LATCH	20
SAFETY CHECK	21
UNINSTALLING BASE	21

BASE INSTALLATION WITH VEHICLE SEAT BELT	22
LEVELING BASE	22
SECURING THE BASE WITH VEHICLE SEAT BELT	22
SECURING THE BASE (LAP AND SHOULDER BELT INSTALLATION)	23
SECURING THE BASE (LAP BELT ONLY INSTALLATION)	24
SAFETY CHECK	25
UNINSTALLING BASE	25

TABLE OF CONTENTS

CARRIER INSTALLATION WITH VEHICLE SEAT BELT	26
LEVELING THE CARRIER	26
DETERMINING BEST INSTALLATION METHOD	26
LAP/SHOULDER BELT EUROPEAN ROUTING METHOD	27
INSTALLATION WITH LOCKING CLIP	28
LAP/SHOULDER BELT STANDARD ROUTING METHOD	29
LAP BELT ONLY ROUTING METHOD	30
SAFETY CHECK	30
AIRCRAFT INSTALLATION	31

GENERAL USE

INFANT INSERT (RECOMMENDED 4-8 LBS)	32
HARNESS BUCKLE POSITIONING	32
SIP CARRIAGE + HARNESS POSITIONING	33
SECURING YOUR CHILD	34
PINCH TEST	35
ATTACHING INFANT CARRIER TO BASE	36
RELEASING INFANT CARRIER FROM BASE	36
TUCK-AWAY CANOPY	37
CARRY HANDLE	37
IMPORTANT CHECKS	38

32

39

STROLLER COMPATIBILITY

FITTING INFANT CARRIER TO CRUZ FRAME	39
RELEASING INFANT CARRIER FROM CRUZ FRAME	39
FITTING ADAPTERS TO VISTA FRAME	40
FITTING INFANT CARRIER TO VISTA FRAME ADAPTERS	41
RELEASING INFANT CARRIER FROM VISTA FRAME ADAPTERS	41

CARE + MAINTENANCE	42
SIP COVER REMOVAL	42
SEAT FABRIC REMOVAL	43
SEAT FABRIC INSTALLATION	45
SIP COVER INSTALLATION	47
CLEANING	48
LIMITED WARRANTY	49

CERTIFICATION



This child restraint conforms to all applicable Federal Motor Vehicle Safety Standards (FMVSS).



This child restraint is certified for aircraft use. UPPAbaby and the Federal Aviation Administration (FAA) strongly urge you to secure your child in a child restraint system (CRS) or device for the duration of your flight.

USE RECOMMENDATIONS

Children should remain rear-facing for as long as possible.

UPPAbaby^{*} and the American Academy of Pediatrics^{*} advise parents to keep their toddlers in rear-facing car seats until age 2, or until they reach maximum height and weight for their seat. Do not use this child restraint beyond the expiration date or if the child outgrows either the weight or height requirements.

This child restraint is for use by children who meet BOTH requirements below:

WEIGHT REQUIREMENTS: 4-35 lbs (1.8 - 15.9 kg)

Includes Infant Insert recommended for use with infants weighing 4-8 lbs (1.8 - 3.6 kg)

HEIGHT REQUIREMENTS: 32 inches (81.3 cm) or less



head should not be less

than 1 inch from the top

of the headrest when in its highest position.



Harness should be at the shoulders or slightly below.



Chest clip must be at armpit level and harness straps should be snug.

REGISTRATION



Please register your child restraint by filling out and sending the postage-paid registration card that came with your child restraint OR register online at: www.uppababy.com/registration/carseat.

Child restraints can be recalled for a variety of safety reasons. If you send us your contact information, we can alert you if there is a safety concern with your child restraint.

For recall information, call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236 (TTY: 1-800-424-9153), or go online to www.nhtsa.gov.

TAKE A MOMENT TO FILL OUT THE FOLLOWING INFORMATION:

Information can be found on the manufacture labels or engraved on the underside of the carrier

Serial Number:	
Date of Purchase:	

NOTICE OF EXPIRATION



Discontinue use of this child restraint after 7 vears from the date of manufacture or after a crash. Refer to labels on bottom of Carrier and Base

UPPAbaby reserves the right to make design changes and improvements to any of our products as part of our commitment to innovation.

DEATH OR SERIOUS INJURY CAN OCCUR

According to accident statistics, children are safer when properly restrained in the rear seating positions than in the front seating positions.

Child restraint systems should be securely belted to the vehicle, even when they are not occupied, since in a crash an unsecured child restraint system may injure other occupants.

Use only in rear-facing position when using it in the vehicle



NEVER place this child restraint on a front seat with an airbag. **DEATH** OR SERIOUS INJURY can occur. An airbag can strike a rear-facing infant restraint with enough force to crack the shell and seriously injure or kill an infant. The back seat is the safest place for children 12 and under. Refer to the vehicle owner's manual before installing this child restraint in a seating position with side airbags. BEFORE YOU BEGIN

WARNINGS + GENERAL SAFETY INFORMATION

Snugly adjust the belts provided with this child restraint around your child. A snug strap should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.

SUFFOCATION HAZARD: Infant carrier can roll over on soft surfaces and suffocate child. **NEVER** place carrier on beds, sofas, or other soft surfaces.



STRANGULATION HAZARD:
Children have strangled in loose
or partially buckled harness straps.
Fully restrain the child even when carrier is used outside the vehicle.

- **NEVER** leave child in carrier when straps are loose or undone.
- **NEVER** place carrier near window where cords from blinds or drapes can strangle a child.
- **NEVER** hang strings on or over the carrier or attach to handle.
- **NEVER** place items with a string around a child's neck, such as hood strings, pacifier cords, etc.

WARNINGS + GENERAL SAFETY INFORMATION

FALL HAZARD: Child's movement can slide carrier.

• **NEVER** place carrier near edges of counter tops, tables, or other elevated surfaces. **DO NOT** use on shopping carts.

SAFETY WARNINGS:

Failure to follow these instructions could result in serious injury to your child or other vehicle occupants.

- DO NOT leave child unattended.
- **DO NOT** use the infant carrier if it is damaged or broken, expired (over 7 years from date of manufacture), missing instructions, missing parts, or if the straps are cut, frayed, or damaged in any way.
- **DO NOT** use this child restraint system if it has been in a vehicle accident.
- **DO NOT** use clothing or blankets that interfere with fastening or tightening the harness. **INSTEAD** place a blanket over the child after being properly secured in the harness.

WARNINGS + GENERAL SAFETY INFORMATION

BEFORE YOU BEGIN

- **SAFETY WARNINGS:**
- **DO NOT** use this child restraint if the top of the child's head is less than 1 inch from the top of the headrest when in its highest position.
- **DO NOT** use this child restraint in a vehicle seating position where it cannot be tightly secured.
- **DO NOT** install in rear-facing or side-facing vehicle seats.
- **DO NOT** modify this restraint except as instructed in this instruction manual. Minor modifications can change the way a child restraint performs in a crash.
- **DO NOT** carry by the canopy.
- **DO NOT** leave loose objects, e.g. cups, toys, bags, umbrellas, etc., in the vehicle because they can become deadly projectiles in a crash.
- **DO NOT** take child out of the child restraint while the vehicle is moving.
- **DO NOT** allow children to play with this child restraint. It is not a toy.

SAFETY WARNINGS:

• **DO NOT** use any accessories, pads, toys, or other products supplied by other manufacturers, known as "non-regulated products," unless approved and tested by UPPAbaby.

WARNINGS + GENERAL SAFETY INFORMATION

- **ALWAYS** keep child properly harnessed when child is in carrier.
- **ALWAYS** check all surfaces of restraint before securing your child. In warm weather, child restraints can become very hot.
- **ALWAYS** properly store LATCH connectors when not in use.

OVERVIEW OF BASE

OVERVIEW OF BASE














CHOOSING A VEHICLE SEATING LOCATION

PLEASE READ THE FOLLOWING INFORMATION **BEFORE INSTALLING THIS CHILD RESTRAINT!**



Always park on a level surface when installing a child restraint

The safest seating position is one that works best for your specific car seat, family and vehicle. When determining whether the MESA infant car seat can be used with LATCH in the rear center seating position, it is critical that you refer to your vehicle owner's manual. If the MESA does not install best in the rear center seating location, it is recommended to move to one of the outboard seating positions.



Before installing this child restraint vou must determine the method of installation and the best vehicle seating position for that method. This child restraint can be installed either using LATCH (Lower Anchors and Tethers for CHildren) or the Vehicle Seat Belt

DETERMINING BEST INSTALLATION METHOD

At this point take out your VEHICLE OWNER'S MANUAL. You will need this to look up different features in your vehicle that might affect the installation.

WARNING! NEVER place a rear-facing only child restraint in front of an active airbag.

BASE INSTALLATION









Installation (pg. 22)



Lap Belt Only Installation (pg. 22)

CARRIER INSTALLATION WITHOUT BASE



Lap/Shoulder Belt European Routing Method (pg. 26)



Lap/Shoulder Belt Standard Routing Method (pg. 26)




Lap Belt Only Routing Method (pg. 26)

OVERVIEW OF LATCH

Most vehicles manufactured after September 1, 2002 are equipped with LATCH (Lower Anchors and Tethers for CHildren). Check your vehicle owner's manual to determine LATCH compatible seating positions.

NOTE: No tether is required with this infant carrier. Only lower anchors are used.




NOTE: In order to use the rear center seating position with LATCH, the distance between the lower anchors may be up to 22" and the seating position must be approved by the vehicle manufacturer. If spacing between the lower anchors is greater than 22" or if the seating position is not approved by the vehicle seat belt for installation.

• OVERVIEW OF VEHICLE SEAT BELT SYSTEMS

If you do not use LATCH to properly secure the child restraint you must use the **Vehicle Seat Belt System**. Seat belt systems vary by make, model, and year of your vehicle. There are some vehicle belts that will NOT work with this child restraint or that require additional steps.

CHECK YOUR VEHICLE OWNER'S MANUAL for information regarding your vehicle seat belt system(s).

This child restraint is compatible with most vehicle seat belt systems.



DEATH OR SERIOUS INJURY CAN OCCUR

CHECK YOUR VEHICLE OWNER'S MANUAL for information regarding your vehicle seat belt system(s). Not all vehicle seat belts work with this child restraint.

DO NOT use this child restraint with the following seat belt systems:




VEHICLE COMPATIBILITY



Lap belts with emergency locking retractor



Lap/Shoulder with two retractors





DO NOT use this child restraint with the following vehicle seats:



Vehicle seats that face rear of the vehicle



Vehicle seats that face side of the vehicle



LEVELING BASE




STEP 1: Place the base rear-facing on the vehicle seat.

STEP 2: Press the recline adjustment button on the top of the base to extend the foot and change the recline angle. Check the angle indicators on either side of the base. The base is level when only the green marker is visible between the two arrows. No red should be visible






NOTE: If proper angle cannot be achieved with adjustable foot, pool noodles or a rolled towel may be used.



BASE INSTALLATION WITH LATCH






STEP 3: Locate the LATCH connectors on either side of the base and remove by pushing the corresponding orange button on the top of the base 1 while pulling the connector out of the storage pocket 2.

STEP 4: Attach the LATCH connectors to the vehicle anchor bars located in the vehicle seat bight (crease of seat).

NOTE: Check LATCH connectors are in the upright position.





STEP 5: Apply pressure firmly into the base allowing all the excess LATCH webbing to retract and tighten.

NOTE: Push into the seat bight (crease of seat). Installation is complete when tightness indicator turns from red to green.

SAFETY CHECK


- Base doesn't move more than 1 inch side to side at the belt path \triangle .
- Ensure tightness indicator is green after each use. If it is not, apply pressure in the seat bight (crease of seat) to tighten **B**.
- Belts are secure and untwisted
- Recline angle is correct. Base is level when only green is visible between the two arrows on the level indicator. No red should be visible **G**.







UNINSTALLING BASE






STEP 1: Press the red button on the LATCH connector **1** while pulling the connector off the vehicle anchor (2).

STEP 2: Store LATCH connectors in designated housing found on each side of the base.

LEVELING BASE







STEP 1: Place the base rear-facing on the vehicle seat.

STEP 2: Press the recline adjustment button on the top of the base to extend the foot and change the recline angle. Check the angle indicators on either side of the base. The base is level when only the green marker is visible between the two arrows. No red should be visible





NOTE: If proper angle cannot be achieved with adjustable foot, pool noodles or a rolled towel may be used.

22

SECURING THE BASE WITH VEHICLE BELT



STEP 3: Open lock-off. PROCEED TO:


Securing the Base (Lap and Shoulder Belt Installation - pg. 23, steps 4A-6A)

or

Securing the Base (Lap Belt Only Installation - pg. 24, steps 4B-6B).

SECURING THE BASE (LAP AND SHOULDER BELT INSTALLATION)

STEP 4A: Route the vehicle belt through the belt path while guiding the lap portion of the belt as close as possible to the top of the lock-off where the door hinges. Buckle the vehicle belt







STEP 5A: Hold shoulder portion of belt above base. With one hand push down base in the direction of the seat bight (crease of seat) and hold firm as you pull shoulder belt **1**. While holding taut, slide shoulder belt back

CUPPAbaby MESA Instruction Manual

through the belt path as close as possible to the top of the lock-off $\mathbf{2}$.




NOTE: TIGHTNESS INDICATOR SHOULD **BE GREEN**.

STEP 6A: Close the lock-off door **NOTE**: Check that the belt doesn't move more than 1 inch at belt path. If you are having trouble achieving a secure installation in the center seat position, please install using the locking clip (pg. 28).



SECURING THE BASE (LAP BELT ONLY INSTALLATION)



STEP 4B: Route the vehicle belt through the belt path while guiding the lap portion of the belt as close as possible to the topside of the lock-off where the door hinges. Buckle the vehicle belt.



STEP 5B: With one hand push down base and hold firm as you pull lap belt to tighten and remove any slack.



NOTE: TIGHTNESS INDICATOR SHOULD BE GREEN.



STEP 6B: Close the lock-off door.

NOTE: Before closing the lock-off door, make sure the vehicle seat belt has not slipped down into the belt path and is as close as possible to the topside of the lock-off where the door hinges.

SAFETY CHECK

• Lock-off must be used at all times when installing with a vehicle seat belt.

- Base doesn't move more than 1 inch side to side at the belt path (A). If movement is more than 1 inch, twist the *buckle* and then fasten the seat belt to help secure fit.
- Ensure tightness indicator is green after each use. If it is not, open lock-off then tighten belt. When tightness indicator turns green, close lock-off ^(B).
- Belts are secure and untwisted
- Recline angle is correct. Base is level when only green is visible between the two arrows on the level indicator. No red should be visible C.









UNINSTALLING THE BASE

- STEP 1: Unbuckle seat belt. STEP 2: Open lock-off. STEP 3: Remove seat belt.

LEVELING THE CARRIER





STEP 1: Place the carrier rear-facing on the vehicle seat. **STEP 2:** Make sure the vehicle is parked on level ground and the red line on the carrier is level to the vehicle floor.



NOTE: For a more stable installation, a pool noodle or rolled towel may be used.

DETERMINING BEST INSTALLATION METHOD

LAP/SHOULDER EUROPEAN ROUTING METHOD (PREFERRED): Shoulder portion is wrapped around back of carrier and secured. (proceed to pg. 27)

LAP/SHOULDER STANDARD ROUTING METHOD: If the shoulder belt is not long enough to wrap around the back of the carrier, follow this method. (proceed to pg. 29)

LAP ONLY METHOD: No shoulder belt is used. This method applies to vehicles with no shoulder belt and aircraft. (proceed to pg. 30)

LAP/SHOULDER BELT EUROPEAN ROUTING METHOD









STEP 1: Route the lap portion of the seat belt through the two lap belt guides on the carrier then buckle the seat belt.

STEP 2: Pull shoulder belt out all the way and route behind the back of the carrier.

STEP 3: Open the shoulder belt guide.

STEP 4: Route the belt through the shoulder belt guide.

NOTE: If the belt is not long enough to go around the back of the carrier, please use the Lap/Shoulder Belt Standard Routing Method (pg. 29).

LAP/SHOULDER BELT EUROPEAN ROUTING METHOD





STEP 5: Lock vehicle seat belt. **NOTE:** See vehicle owner's manual for more information on locking your seat belt for child restraint installations.

▲ WARNING! Vehicle seat belt must lock; otherwise a locking clip must be used. See instructions below.

STEP 6: Push the carrier into the vehicle seat bight (crease of the seat) while pulling on the shoulder portion of the seat belt closest to the buckle.



INSTALLATION WITH LOCKING CLIP

NOTE: The locking clip can be found on the underside of the lower carrier fabric (pg. 12). The locking clip can be used FOR CARRIER AND BASE installation with Lap/Shoulder belt combination when the seat belt does not lock.







STEP 1: While pushing into the child restraint, pull the seat belt tight to eliminate any slack then pinch both pieces of seat belt webbing directly behind the latch plate. Unbuckle the belt without letting the webbing slip.

STEP 2: Thread the locking clip onto both lap and shoulder belts linch from the latch plate.

STEP 3: Re-buckle the vehicle belt.

NOTE: Follow this routing method if the shoulder belt is not long enough to wrap around the back of the carrier.

LAP/SHOULDER BELT STANDARD ROUTING METHOD







STEP 1: Route the lap portion of the seat belt through both lap belt guides on the carrier, and buckle the seat belt.

STEP 2: Lock vehicle seat belt. **NOTE:** See vehicle owner's manual for more information on locking your seat belt for child restraint installations.

▲ WARNING! Vehicle seat belt must lock; otherwise a locking clip must be used. See pg. 28 for instructions

STEP 3: Push the carrier into the vehicle seat bight (crease of the seat) while pulling on the shoulder portion of the seat belt closest to the buckle.

CARRIER INSTALLATION WITH VEHICLE SEAT BELT

LAP BELT ONLY ROUTING METHOD





STEP 1: Route the lap belt through both guides on the carrier, and buckle the seat belt.

STEP 2: Push the carrier into the vehicle seat bight (crease of the seat) while pulling on the loose portion of the lap belt closest to the buckle.



SAFETY CHECK







- Carrier doesn't move more than 1 inch side to side at the belt guides (A).
- Belts are secure and untwisted.
- Angle is correct when the vehicle is parked on level ground and the red line on the carrier is level to the vehicle floor **B**
- Seating position is permitted by both UPPAbaby and your vehicle manufacturer for use with the type of Vehicle Seat Belt.
- Carry handle is locked in any of the three (3) positions G

AIRCRAFT INSTALLATION



THIS CHILD RESTRAINT IS CERTIFIED FOR AIRCRAFT USE.

UPPAbaby and the Federal Aviation Administration (FAA) strongly recommend that children up to 40 lbs (18 kg) use a certified harnessed child restraint or other device approved for aircraft travel.

When installing this child restraint on an airplane, install the same way as **Carrier Installation with Vehicle Seat Belt/Lap Belt Only Routing Method** (pg. 30).

IMPORTANT: Make sure that the aircraft buckle does not interfere with the belt guides on the infant carrier.

IMPORTANT NOTES:

- Notify the airline ahead of time that you'll be traveling with a child restraint.
- Install this infant carrier in a window seat to avoid blocking the aisle.
- Ask for a seat belt extender if the lap belt is too short.
- Use only on a forward-facing aircraft seat.
- DO NOT use this restraint if a secure installation cannot be achieved.
- Place carry handle in any of the (3) locked positions for use in the aircraft as long as it doesn't interfere with the back of the seat in front of the carrier.

AWARNING!

- DO NOT use base with aircraft installation. Only the carrier is certified for aircraft use.
- Inflatable seat belts are NOT compatible with this child restraint.

SIP CARRIAGE + HARNESS POSITIONING

INFANT INSERT (4-8 LBS)

To ensure a better fit for smaller infants, we recommend using the infant insert (included) between 4 and 8 lbs. Remove infant insert when infant begins growing on top of the buckle making it difficult to buckle harness.



NOTE: Never use after market products with this child restraint, unless approved by UPPAbaby.

HARNESS BUCKLE POSITIONING

Always position the buckle closest to the child. If the child is on top of the buckle in the inner position, then adjust the buckle to the outer position.







STEP 1: Unbuckle the harness

STEP 2: Flip carrier over, insert the metal clip completely through the shell and seat pad.

STEP 3: Locate the appropriate buckle slot and insert from the top completely through the slot on the seat pad and shell.

NOTE: When using the inner slot with a small infant, a rolled washed cloth or small blanket may be placed in between the crotch of the infant and the buckle.





This child restraint has an adjustable head restraint and no-rethread harness system that is easy to adjust to properly secure the child.

STEP 1: Adjust the head restraint by pulling on the adjuster tab **1** and sliding the head restraint up or down 2.

STEP 2: Position the head restraint so the harness rests at the child's shoulders or slightly below.

SECURING YOUR CHILD

STEP 1: Loosen the harness by pressing on the harness release button and pulling out the shoulder straps.

STEP 2: Open the chest clip, unbuckle the harness, and tuck the buckle tongues into the side pockets to hold harness open.

STEP 3: Place baby in child restraint making sure their body is making full contact with the seating surface. Place harness over child and insert buckle tongues into the buckle until a "click" is heard. Pull up on the buckle tongues to make sure they are locked.

NOTE: For smaller babies, it is recommended to remove the harness pads for a more secure fit.













STEP 4: Pull up on the harness to remove excess slack around the child's legs.

STEP 5: Pull the harness adjuster strap to snugly adjust the harness straps around your child.

STEP 6: Close chest clip and position at armpit level. Make sure the shoulder pads don't interfere with positioning the chest clip.

PINCH TEST

SECURING YOUR CHILD



HARNESS SHOULD BE SNUG.

Pinch harness webbing at child's shoulders. If you can pinch webbing, the harness is too loose and should be tightened.

ATTACHING INFANT CARRIER TO BASE



NOTE: Handle can be in any of the three (3) locked positions for use in the vehicle.

STEP 1: Place carrier on base until a click is heard **1**.

STEP 2: Check for a secure connection by pulling up on carry handle **2**.



RELEASING INFANT CARRIER FROM BASE



STEP 1: Pull and hold carrier release button on back of the carrier **STEP 2:** Lift carrier off base.





TUCK-AWAY CANOPY

Tuck-away canopy easily adjusts to one of three (3) positions.

TO EXTEND CANOPY: Slowly pull forward on main canopy frame until resting in desired position.

TO RETRACT/STOW CANOPY:

Gently push downward on main canopy frame allowing the center support and canopy fabric to guide into the storage compartment in carrier.

CARRY HANDLE





The carry handle must be locked in any three (3) positions when in use: (A) carry, (B) store and (G) stand.

To adjust the carry handle position, squeeze both handle adjustment buttons and rotate forward or backward.

WARNING!

NEVER hang toys and other objects from the carry handle when using in the vehicle. These products have not been tested by UPPAbaby and therefore are not approved for use with this child restraint. GENERAL USE







IMPORTANT CHECKS

- This child restraint is for rear-facing use only.
- The seat must be tightly installed in a forward-facing vehicle seat.
- The harness should be at the shoulders or slightly below **(A**).
- Chest clip must be at armpit level and harness straps should be snug **B**.
- The top of child's head should not be less than 1 inch from the top of the headrest when in its highest position.
- The child must weigh between 4 and 35 pounds and be no taller than 32 inches.
- The back seat is the safest place for children aged 12 and under.
- NEVER use add-on products with this child restraint, unless approved by UPPAbaby.
- NEVER place in front of an active airbag.
- Install using LATCH or the vehicle seat belt, NOT BOTH.
- DO NOT secure an infant in the carrier with extra material, bulky clothing, or extra padding. Instead place a blanket over the harness after properly securing the child G.
- Carry handle must be locked in any of the (3) handle positions.
- Adjust base to the appropriate angle by using the angle indicator on the sides of the base or the level to ground line on the carrier.
- Always check the tightness indicator is green after each use.
- Always secure an unoccupied child restraint; in a crash an unsecured infant car seat may injure occupants in your vehicle.

FITTING INFANT CARRIER TO CRUZ FRAME

Prior to fitting MESA seat to CRUZ frame, engage brake on CRUZ and remove toddler seat from frame.

STEP 1: With carrier facing stroller handle, align carrier handle hubs with attachment posts on stroller.

STEP 2: Let carrier slide onto attachment posts. An audible click indicates proper attachment.

STEP 3: Lift up on car seat handle to check attachment.



RELEASING INFANT CARRIER FROM CRUZ FRAME




STEP 1: Engage and hold the stroller release button on the top of the carry handle.

STEP 2: Lift the carrier off CRUZ frame.

FITTING ADAPTERS TO VISTA FRAME

Prior to fitting adapter to VISTA frame, engage brake on VISTA and remove toddler seat or bassinet from frame.

NOTE: VISTA stroller models require use of included adapters.



TO ATTACH: Place adapters (logo facing out) onto seat attachments and press until you hear a click.

TO REMOVE: Push down release button on backside of adapter and lift up from stroller frame.

NOTE: There are 2 adapters, one for the left and one for the right side of the stroller. The adapters are marked with "L" and "R" respectively. (The left adapter and left side of the stroller are determined by the driver's left.

NOTE: Indicators should appear green as confirmation of secure installation. If the indicator symbol is red then the adapter is not secure. Remove the adapter and try fastening it again.

FITTING INFANT CARRIER TO VISTA FRAME ADAPTERS


STEP 1: With carrier facing stroller handle, align carrier stroller hubs with adapters on stroller.

STEP 2: Let carrier slide onto adapter posts.

STEP 3: Lift up on car seat handle to check attachment.



RELEASING INFANT CARRIER FROM VISTA FRAME ADAPTERS



STEP 1: Engage and hold the stroller release button on the top of the carry handle.

STEP 2: Lift the carrier off the adapters on VISTA frame.

STROLLER COMPATIBILITY

SIP COVER REMOVAL







STEP 1: Unbuckle chest clip and harness.

STEP 2: Pull forward on SIP cover releasing harness straps. **STEP 3:** Pull SIP cover down from bottom and release.











STEP 1: Remove buckle cover.

STEP 2: Unhook harness adjuster strap from underside of carrier.

STEP 3: Remove (4) plastic tabs from front sides of carrier.

STEP 4: Loosen fabric from front end of carrier and free fabric from around harness release button housing.

STEP 5: Raise SIP to highest position and pull back fabric panel.

SEAT FABRIC REMOVAL

CARE + MAINTENANCE

CARE + MAINTENANCE

SEAT FABRIC INSTALLATION













STEP 1: With the SIP in the lowest position install seat fabric behind SIP. **STEP 2:** Thread SIP adjuster tab through buttonhole located on top of seat fabric.


STEP 3: Insert the (6) upper plastic tabs into slots in carrier.

STEP 4: Feed buckle through buttonhole in seat fabric.

STEP 5: Install buckle cover tucking tabs through buttonhole.

STEP 6: Raise the SIP and place buckle in buckle storage pockets.

SEAT FABRIC REMOVAL








STEP 6: Slide SIP to lowest position and release (6) plastic tabs from upper portion of carrier.

STEP 7: Thread SIP adjuster tab through buttonhole in top of seat pad.

STEP 8: Pull seat fabric up and forward to remove fabric around SIP.

SIP COVER INSTALLATION

SEAT FABRIC INSTALLATION

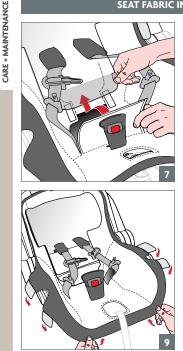




STEP 7: Lift lower part of SIP and secure fabric panel.

STEP 8: Pull harness adjuster strap through opening in seat pad and install pad around harness release button housing.

STEP 9: Wrap fabric around front lip and install (4) plastic tabs. **STEP 10:** Reconnect harness adjuster strap.





STEP 1: Insert lower part of SIP carriage into pocket on the back of SIP cover.STEP 2: Guide harness straps back into slots in SIP cover.STEP 3: Secure SIP cover tightly around SIP ears.

LIMITED WARRANTY

CLEANING FABRICS

Fabrics include: seat pad, infant inserts, buckle pads and shoulder pad.







iron

Machine wash in cold Dry flat and away water on gentle cycle from direct sunlight with mild detergent. storage.

DO NOT bleach, iron or drv clean. before re-use or

CLEANING HARNESS WEBBING + CANOPY



before re-use or storage.

CLEANING PLASTIC

mild detergent.



CLEANING BUCKLE AND LATCH HARDWARE

NOTE: Buckle should fasten with a "click" if not, rinse under warm running water. DO NOT use detergents or lubricants.

Your UPPAbaby infant car seat is warranted to be free from any manufacturing defects for a period of 2 years from the date of purchase under normal use and in compliance with the operating instructions.

This warranty cannot be extended and an extended warranty cannot be purchased.

This warranty is not transferable and extends only to the original retail purchaser and is only valid when supplied with proof of purchase. Please retain proof of purchase for this limited warranty.

The warranty is valid only in the original country of purchase. This warranty is subject to the conditions set forth by country in which the items were purchased. Conditions may vary. UPPAbaby will not ship replacement or repair parts out of the country of purchase.

UPPAbaby will provide replacement parts or conduct repairs as determined fitting by the company. UPPAbaby reserves the right to exchange item with a replacement part. Some parts may be replaced with newer model parts as the infant car seat is improved over time.

Please note that a repair issue will NOT be covered by this warranty if:

- The issue is caused by misuse or poor maintenance. Please refer to this instruction booklet for guidance on infant car seat use and maintenance.
- Damage is caused by improper installation of UPPAbaby parts and/or accessories. Please refer to this instruction booklet for guidance on infant car seat assembly and use.
- Damage is corrosion caused by lack of maintenance or service.
- Damage is due to general wear and tear, which is the result of everyday use or negligence.
- Damage is caused by sun intensity, sweat, detergents, damp storage or frequent washings.
- Repairs or modifications are carried out by a third party.
- Infant car seat is purchased from an unauthorized retailer. Approved retailers are listed on our website at www.uppababy.com.
- Infant car seat is second-hand.
- Infant car seat is damaged as a result of an accident, airline or freight damage.

UPPAbaby reserves the right to determine if warranty terms and conditions have been met. Please contact your local distributor if you have any questions regarding warranty.

CUSTOMER SERVICE

COUNTRY	CONTACT	TELEPHONE	WEBSITE
US	60 Sharp Street Hingham, MA 02043	781.413.3030	www.uppababy.com

Register your infant car seat online at www.uppababy.com.

UPPAbaby

UPPAbaby 60 Sharp Street, Hingham, MA 02043 781.413.3000 www.uppababy.com Model 0070 | Version 2

CRUZ, MESA, VISTA and UPPAbaby are trademarks and/or registered trademarks of Monahan Products LLC. All other trademarks are the property of their respective owners.